


Applications


- Current transformers
- Ground fault protection devices
- High frequency cores

Benefits

- Low core loss at high frequencies (>1 kHz)
- High operating temperature with minimal flux density reduction
- Can be annealed for high permeability in low or high frequencies

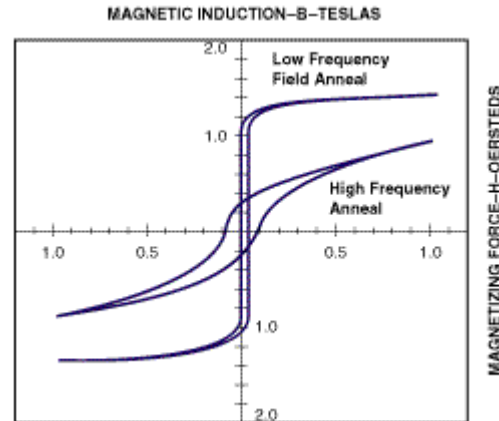

Typical Impedance Permeability Curves, Various Field Anneal

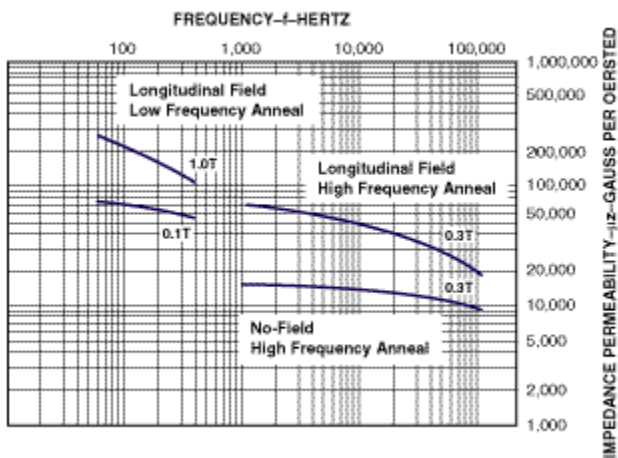


Physical Properties

Density (g/cm ³)	7.29
Vicker's Hardness (50g Load)	.860
Tensile Strength (GPa)	1-2
Elastic Modulus (GPa)	100-110
Lamination Factor (%)	>75
Thermal Expansion (ppm/°C)	.6.7
Crystallization Temperature (°C)	.535
Continuous Service Temp. (°C)	.150

Magnetic Properties

Saturation Induction (T)	1.41
Maximum D.C. Permeability (μ):	
Annealed	35,000
As Cast	>20,000
Saturation Magnetostriction (ppm)	.20
Electrical Resistivity (μ -cm)	.138
Curie Temperature (°C)	.358

**Typical Core Loss Curves, Longitudinal Field Anneal
METGLAS Alloy 2605S3A**

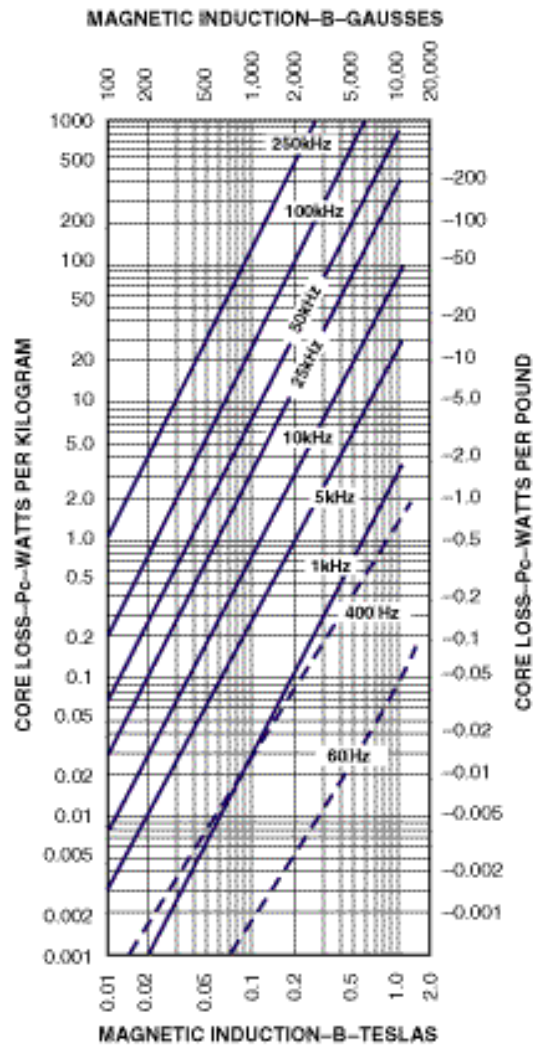

Contact Information:

AMERICAS

Metglas[®], Inc.

440 Allied Drive
Conway, SC 29526

Tel: (800) 581-7654

Tel: (843) 349-7363

Fax: (843) 349-6815